

- EXTERIOR ELEVATION CODED NOTES**
(CLUBHOUSE ELEVATION SHEETS ONLY)
- FIBERGLASS / ASPHALT SHINGLE ROOFING.
 - ALUMINUM GLAD WOOD RAKE EXTENSION - SEE WALL SECTIONS.
 - WATER FLOW DIVERTER - TYPICAL AT VALLEY ENDS.
 - PRE-PRIMED COMPOSITION LAP SIDING BY LOUISIANA PACIFIC (OR EQUAL).
 - CULTURED STONE VENEER, COLOR, STYLE, MORTAR, COLOR, COURSEING & JOINT STYLE TO BE SELECTED BY THE OWNER.
 - 12" SQUARE BUILT-UP COLUMN - SEE DETAIL E ON SHEET A302.
 - VINYL WINDOW UNIT - SEE WINDOW DETAILS ON SHEET A401 FOR SIZE AND TRIM INFORMATION.
 - PRE-HANG INSULATED METAL ENTRY DOOR - PAINTED. SEE DOOR SCHEDULE FOR MORE INFORMATION.
 - 5" ALUMINUM OGEE GUTTER ON 2 X 6 ALUMINUM GLAD WOOD SUB FASCIA (OR AS SPECIFIED ON WALL SECTION) - TYPICAL.
 - VENTED ALUMINUM SOFFIT (TYPICAL) - SEE TYPICAL WALL SECTIONS FOR MORE DETAILS.
 - CONTINUOUS RIDGE VENT LOCATION.
 - DOWNSPOUT LOCATION WITH SPLASH BLOCK (NO SPLASH BLOCK WHERE ROUTED UNDER WALKS).
 - 5/4 X 4 RAKE TRIM ON 1 X 8 BACKER.
 - APPROXIMATE LINE OF GRADE - TO BE COORDINATED WITH BUILDER PRIOR TO START OF CONSTRUCTION - MAINTAIN MINIMUM 6" BELOW FIRST FLOOR.
 - ADDRESS PLAQUE - USE DOUBLE-THICKNESS TRIM AS BACKING. MOUNT TOP @ 5'-5" A.F.F. AND CENTER ON WALL - TYPICAL.
 - EXTERIOR LIGHT FIXTURE - MOUNT TOP @ 7'-8" A.F.F. AT TYPICAL DOOR LOCATIONS. 6/6 TO COORDINATE OTHER MOUNTING HEIGHTS AS NEEDED.
 - CHIMNEY CRICKET.
 - SEE WALL SECTION FOR MORE INFORMATION ON CHIMNEY DETAILS.
 - METAL CHIMNEY CAP & FLASHING - SEE WALL SECTION FOR DETAILS.
 - SLOPED BRICK ROWLOCK BELT COURSE.
 - 5/4 X 6" CORNER TRIM - RIP ONE SIDE TO ACHIEVE 5 1/2" DIMENSION EACH SIDE OF CORNER.
 - 5/4 X 8 WOOD TRIM WITH FLASHING ON 1 X 8 BACKER.
 - 1 X 8 PAINTED COLUMN BASE TRIM WITH BEVELED TOP EDGE.
 - 1 X 4 PAINTED COLUMN CAP TRIM.
 - 1/4" PAINT GRADE FINISH PLYWOOD SHEATHING ON UNDERSIDE OF ARCH - BEND TO RADIUS.
 - SCREENED PORCH BEYOND. SEE DOOR SCHEDULE FOR SCREENED DOOR DETAILS.
 - 5/4 X 6" TRIM.
 - CULTURED STONE VENEER ON COLUMN BASE WALL ON CONCRETE BLOCK WITH COLUMNS ON TOP. SEE DETAIL D ON SHEET A302 AND WALL SECTION A ON SHEET A302.
 - SEE DETAIL C ON SHEET A302 FOR DORMER DETAILS.
 - 5/4 X 8" FRIEZE BOARD TRIM - TYPICAL.
 - 5/4 X 4" TRIM.
 - 5/4 X 4" CORNER TRIM - RIP ONE SIDE TO ACHIEVE 5 1/2" DIMENSION EACH SIDE OF CORNER.
 - INSECT SCREEN IN FRAMED WOOD. FOR SCREENED PORCH DETAILS SEE SHEET A301.
 - BOARD AND BATTEN SIDING.
 - 4" WIDE LIMESTONE CHIMNEY WATER TABLE - TOP OF STONE AT 5'-4" A.F.F.
 - STONE HEARTH - MIN. 2" THICK.
 - 5/4 X 6 WOOD HEADER.
 - 5/4 X 8 ARCHED TRIM - DIMENSIONS AS SHOWN.
 - 5/4 X WOOD TRIM ON 2 X 6 P.T. BUILT-UP "GABLE TRUSS" FRAMING - DIMENSIONS AS SHOWN. SEE WALL SECTIONS.
 - DIRECT VENT GAS THRU FIREPLACE (OUTDOOR LIFESTYLES, TWILIGHT II INDOOR/OUTDOOR FIREPLACE OR EQUAL). PROVIDE GAS LINE & GAS LOG SET - CONTRACTOR TO VERIFY ALL FRAMING DIMENSIONS AND CLEARANCES WITH MANUFACTURER'S INSTRUCTIONS.
- ALL SIDING & TRIM TO BE LOUISIANA PACIFIC "SMART SIDE" CEDAR GRAIN TEXTURE - SIZES AS INDICATED. TRIM IN DIRECT CONTACT WITH CONCRETE TO BE PVC PRODUCT EQUIVALENT.

Building Prototypes
Building Prototypes
000 Your Street
City State & Zip

PROPRIETARY RIGHTS NOTICE
COPYRIGHT 2015 EPCON COMMUNITIES FRANCHISING, INC.
THE DESIGNS SHOWN HERE, AS WELL AS THE ENTIRE DEVELOPMENT SYSTEM, ARE THE PROPERTY OF EPCON COMMUNITIES FRANCHISING, INC. AND ARE SUBJECT TO COPYRIGHT, PATENT, AND TRADE SECRET PROTECTION. USE OF ANY PART OF THESE DESIGNS OR THE DEVELOPMENT SYSTEM IS PROHIBITED WITHOUT THE WRITTEN CONSENT OF EPCON COMMUNITIES FRANCHISING, INC.
ALL RIGHTS ARE RESERVED IN THIS INFORMATION AND ALL RELATED ILLUSTRATIONS, PLANS, BLUEPRINTS, SKETCHES, DRAWINGS, OR ANY OTHER TANGIBLE EXPRESSIONS THEREOF, WHICH ARE THE PROPERTY OF EPCON COMMUNITIES FRANCHISING, INC., 800 STONESHENGE PARKWAY, DUBLIN, OHIO 43017, TELEPHONE (614) 852-1827. NO ONE MAY BUILD, LICENSE, TRANSFER, REPRODUCE OR DUPLICATE THIS WORK IN ANY WAY WITHOUT THE WRITTEN AUTHORIZATION OF EPCON COMMUNITIES FRANCHISING, INC.
THESE DRAWINGS SHALL BE USED IN CONFORMANCE WITH ALL LOCAL, BUILDING, MECHANICAL, PLUMBING AND ELECTRICAL CODES AND SHALL MEET THE REQUIREMENTS OF THE HEALTH DEPARTMENT, FIRE MARSHALL, AMERICANS WITH DISABILITIES ACT ACCESSIBILITY GUIDELINES (ADAAG), THE FAIR HOUSING ACT ACCESSIBILITY GUIDELINES (FHAAG), AND SHALL BE CONSTRUCTED IN CONFORMANCE WITH STATE AND LOCAL ENERGY REQUIREMENTS.

Prototype Disk No.	Interim Page Revisions Revision	Date
		8/4/17


Architect Project Number

Community Dates & Revisions
Date Originated
Bid
Permit
Construction
Revisions
▲
▲
▲


Drawing Title
Exterior Elevations

Architectural Style
European Country
Sheet Number
A.201
Clubhouse 'Medium'

EXHIBIT F-2

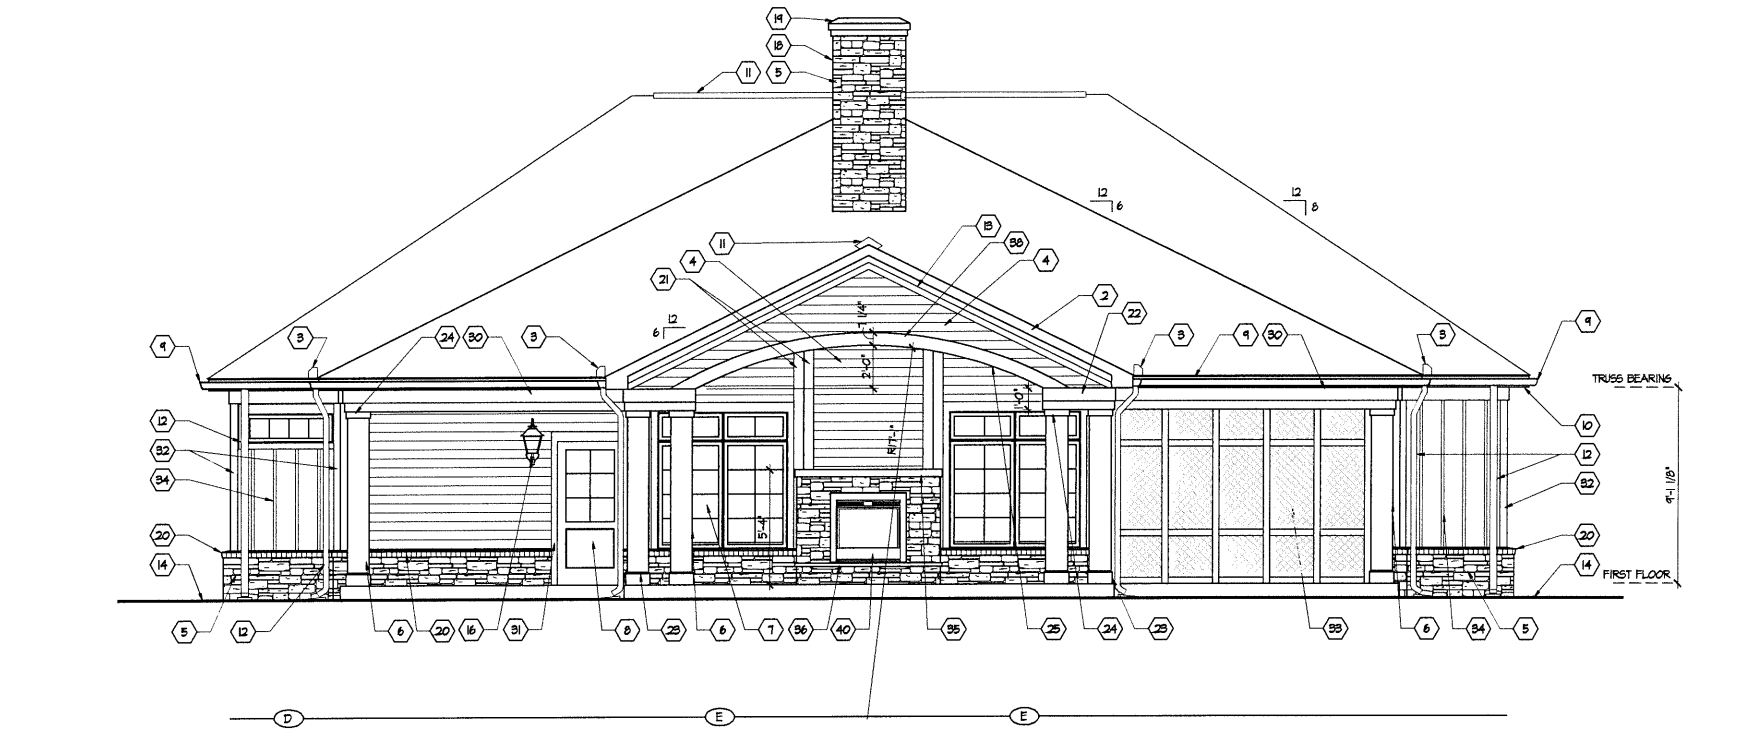

A Rear Elevation
Scale: 1/4" = 1'-0"

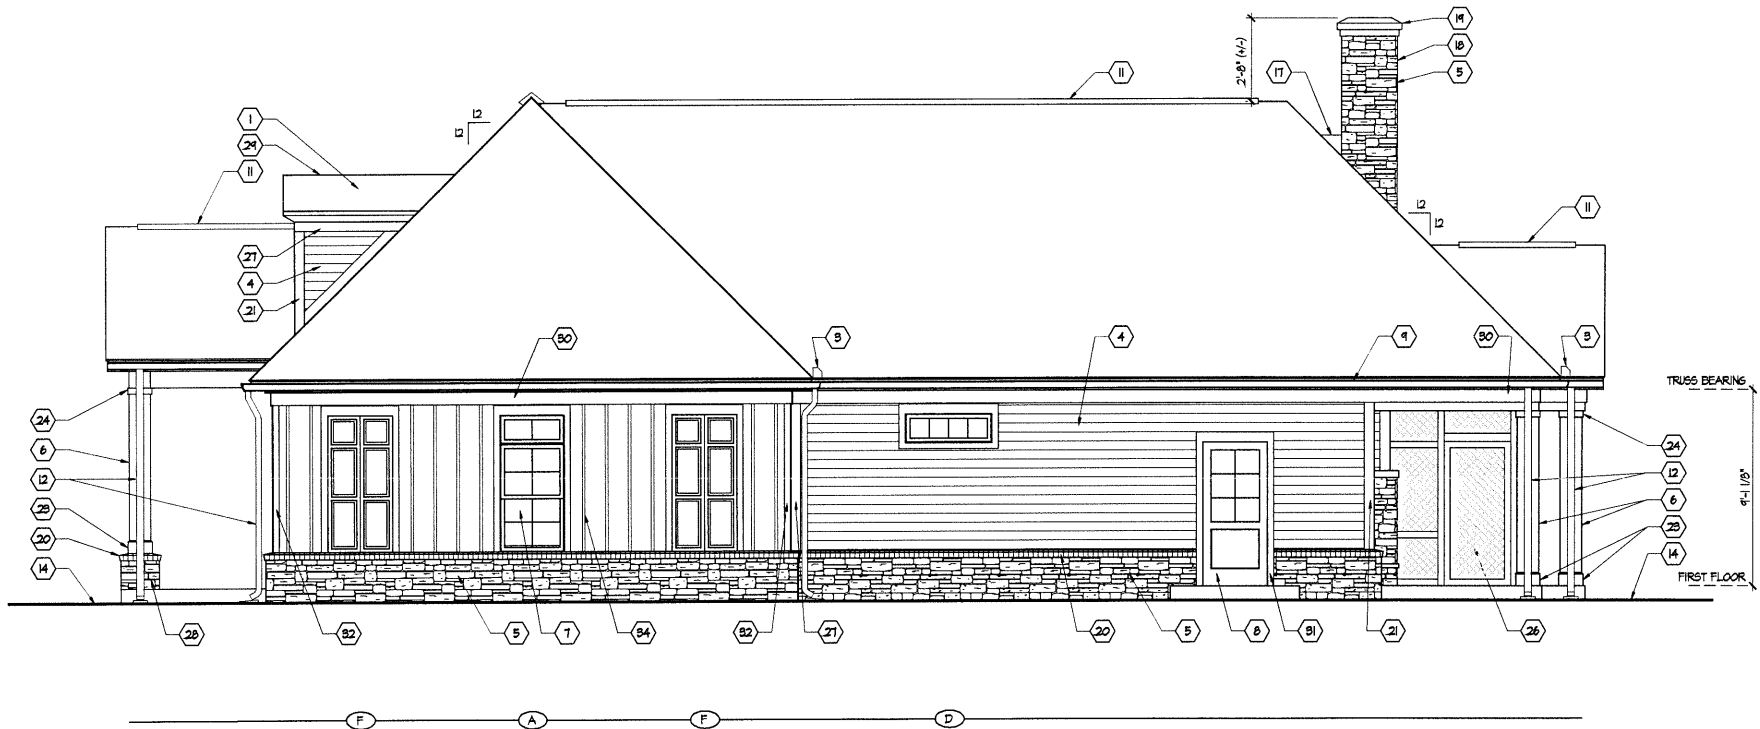

B Right Side Elevation
Scale: 1/4" = 1'-0"

EXTERIOR ELEVATION CODED NOTES
(CLUBHOUSE ELEVATION SHEETS ONLY)

1. FIBERGLASS / ASPHALT SHINGLE ROOFING.
2. ALUMINUM CLAD MOOD RAKE EXTENSION - SEE WALL SECTIONS.
3. WATER FLOW DIVERTER - TYPICAL AT VALLEY ENDS.
4. PRE-PRIMED COMPOSITION LAP SIDING BY LOUISIANA PACIFIC (OR EQUAL).
5. CULTURED STONE VENEER COLOR, STYLE, MORTAR COLOR, COURSING & JOINT STYLE TO BE SELECTED BY THE OWNER.
6. 12" SQUARE BUILT-UP COLUMN - SEE DETAIL E ON SHEET A302.
7. VINYL WINDOW UNIT - SEE WINDOW DETAILS ON SHEET A401 FOR SIZE AND TRIM INFORMATION.
8. PRE-HUNG INSULATED METAL ENTRY DOOR - PAINTED. SEE DOOR SCHEDULE FOR MORE INFORMATION.
9. 5" ALUMINUM OGEE GUTTER ON 2 X 6 ALUMINUM CLAD MOOD SUB FASCIA (OR AS SPECIFIED ON WALL SECTION - TYPICAL).
10. VENTED ALUMINUM SOFFIT (TYPICAL) - SEE TYPICAL WALL SECTIONS FOR MORE DETAILS.
11. CONTINUOUS RIDGE VENT LOCATION.
12. DOWNSPOUT LOCATION WITH SPLASH BLOCK (NO SPLASH BLOCK WHERE ROUTED UNDER WALKS).
13. 5/4 X 4 RAKE TRIM ON 1 X 8 BACKER.
14. APPROXIMATE LINE OF GRADE - TO BE COORDINATED WITH BUILDER PRIOR TO START OF CONSTRUCTION - MAINTAIN MINIMUM 6" BELOW FIRST FLOOR.
15. ADDRESS PLAQUE - USE DOUBLE-THICKNESS TRIM AS BACKING. MOUNT TOP @ 5'-5" A.F.F. AND CENTER ON WALL - TYPICAL.
16. EXTERIOR LIGHT FIXTURE - MOUNT TOP @ 7'-0" A.F.F. AT TYPICAL DOOR LOCATIONS. G.C. TO COORDINATE OTHER MOUNTING HEIGHTS AS NEEDED.
17. CHIMNEY CRICKET.
18. SEE WALL SECTION FOR MORE INFORMATION ON CHIMNEY DETAILS.
19. METAL CHIMNEY CAP & FLASHING - SEE WALL SECTION FOR DETAILS.
20. SLOPED BRICK ROWLOCK BELT COURSE.
21. 5/4 X 6" CORNER TRIM - RIP ONE SIDE TO ACHIEVE 5 1/2" DIMENSION EACH SIDE OF CORNER.
22. 5/4 X 8 MOOD TRIM WITH FLASHING ON 1 X BACKER.
23. 1 X 8 PAINTED COLUMN BASE TRIM WITH BEVELED TOP EDGE.
24. 1 X 4 PAINTED COLUMN CAP TRIM.
25. 1/4" PAINT GRADE FINISH PLYWOOD SHEATHING ON UNDERSIDE OF ARCH - BEND TO RADIUS.
26. SCREENED PORCH BEYOND. SEE DOOR SCHEDULE FOR SCREENED DOOR DETAILS.
27. 5/4 X 6" TRIM.
28. CULTURED STONE VENEER ON COLUMN BASE WALL ON CONCRETE BLOCK WITH COLUMNS ON TOP. SEE DETAIL D ON SHEET A302 AND WALL SECTION A ON SHEET A302.
29. SEE DETAIL C ON SHEET A302 FOR DORMER DETAILS.
30. 5/4 X 8" FRIEZE BOARD TRIM - TYPICAL.
31. 5/4 X 4" TRIM.
32. 5/4 X 4" CORNER TRIM - RIP ONE SIDE TO ACHIEVE 3 1/2" DIMENSION EACH SIDE OF CORNER.
33. INSECT SCREEN IN FRAMED MOOD. FOR SCREENED PORCH DETAILS SEE SHEET A301.
34. BOARD AND BATTEN SIDING.
35. 4" WIDE LIMESTONE CHIMNEY WATER TABLE - TOP OF STONE AT 5'-4" A.F.F..
36. STONE HEARTH - MIN. 2" THICK.
37. 5/4 X 6 MOOD HEADER.
38. 5/4 X 8 ARCHED TRIM - DIMENSIONS AS SHOWN.
39. 5/4 X MOOD TRIM ON 2 X P.T. BUILT-UP "GABLE TRUSS" FRAMING - DIMENSIONS AS SHOWN. SEE WALL SECTIONS.
40. DIRECT VENT GAS THRU FIREPLACE (OUTDOOR LIFESTYLES, TWILIGHT II INDOOR/OUTDOOR FIREPLACE OR EQUAL). PROVIDE GAS LINE & GAS LOG SET - CONTRACTOR TO VERIFY ALL FRAMING DIMENSIONS AND CLEARANCES WITH MANUFACTURER'S INSTRUCTIONS.

ALL SIDING & TRIM TO BE LOUISIANA PACIFIC "SMART SIDE" CEDAR GRAIN TEXTURE - SIZES AS INDICATED. TRIM IN DIRECT CONTACT WITH CONCRETE TO BE PVC PRODUCT EQUIVALENT.



Building Prototypes
Building Prototypes
000 Your Street
City State & Zip

PROPRIETARY RIGHTS NOTICE
COPYRIGHT 2015 EPCON COMMUNITIES FRANCHISING, INC.
THE DESIGNS SHOWN HERE, AS WELL AS THE ENTIRE DEVELOPMENT SYSTEM, ARE THE PROPERTY OF EPCON COMMUNITIES FRANCHISING, INC. AND ARE SUBJECT TO COPYRIGHT, PATENT, AND TRADE SECRET PROTECTION. USE OF ANY PART OF THESE DESIGNS OR THE DEVELOPMENT SYSTEM IS PROHIBITED WITHOUT THE WRITTEN CONSENT OF EPCON COMMUNITIES FRANCHISING, INC.

ALL RIGHTS ARE RESERVED IN THIS INFORMATION AND ALL RELATED ILLUSTRATIONS, PLANS, BLUEPRINTS, SKETCHES, DRAWINGS, OR ANY OTHER TANGIBLE EXPRESSIONS THEREOF, WHICH ARE THE PROPERTY OF EPCON COMMUNITIES FRANCHISING, INC. 800 STONEHEDGE PARKWAY, DUBLIN, OHIO 43017, TELEPHONE (614) 823-2527. NO ONE MAY BUILD, LICENSE, TRANSFER, REPRODUCE OR DUPLICATE THIS WORK IN ANY WAY WITHOUT THE WRITTEN AUTHORIZATION OF EPCON COMMUNITIES FRANCHISING, INC.

THESE DRAWINGS SHALL BE USED IN CONFORMANCE WITH ALL LOCAL BUILDING, MECHANICAL, PLUMBING AND ELECTRICAL CODES AND SHALL MEET THE REQUIREMENTS OF THE HEALTH DEPARTMENT, FIRE MARSHALL, AMERICANS WITH DISABILITIES ACT ACCESSIBILITY GUIDELINES (ADAAG), THE FAIR HOUSING ACT ACCESSIBILITY GUIDELINES (FHAAG), AND SHALL BE CONSTRUCTED IN CONFORMANCE WITH STATE AND LOCAL ENERGY REQUIREMENTS.

Prototype Disk No.	Interim Page Revisions	Date
	Revision	8/4/17

Architect Project Number

Community Dates & Revisions
Date Originated
Bid
Permit
Construction
Revisions
▲
▲
▲


Drawing Title
Exterior Elevations

Architectural Style
European Country

Sheet Number

A.202

Clubhouse 'Medium'

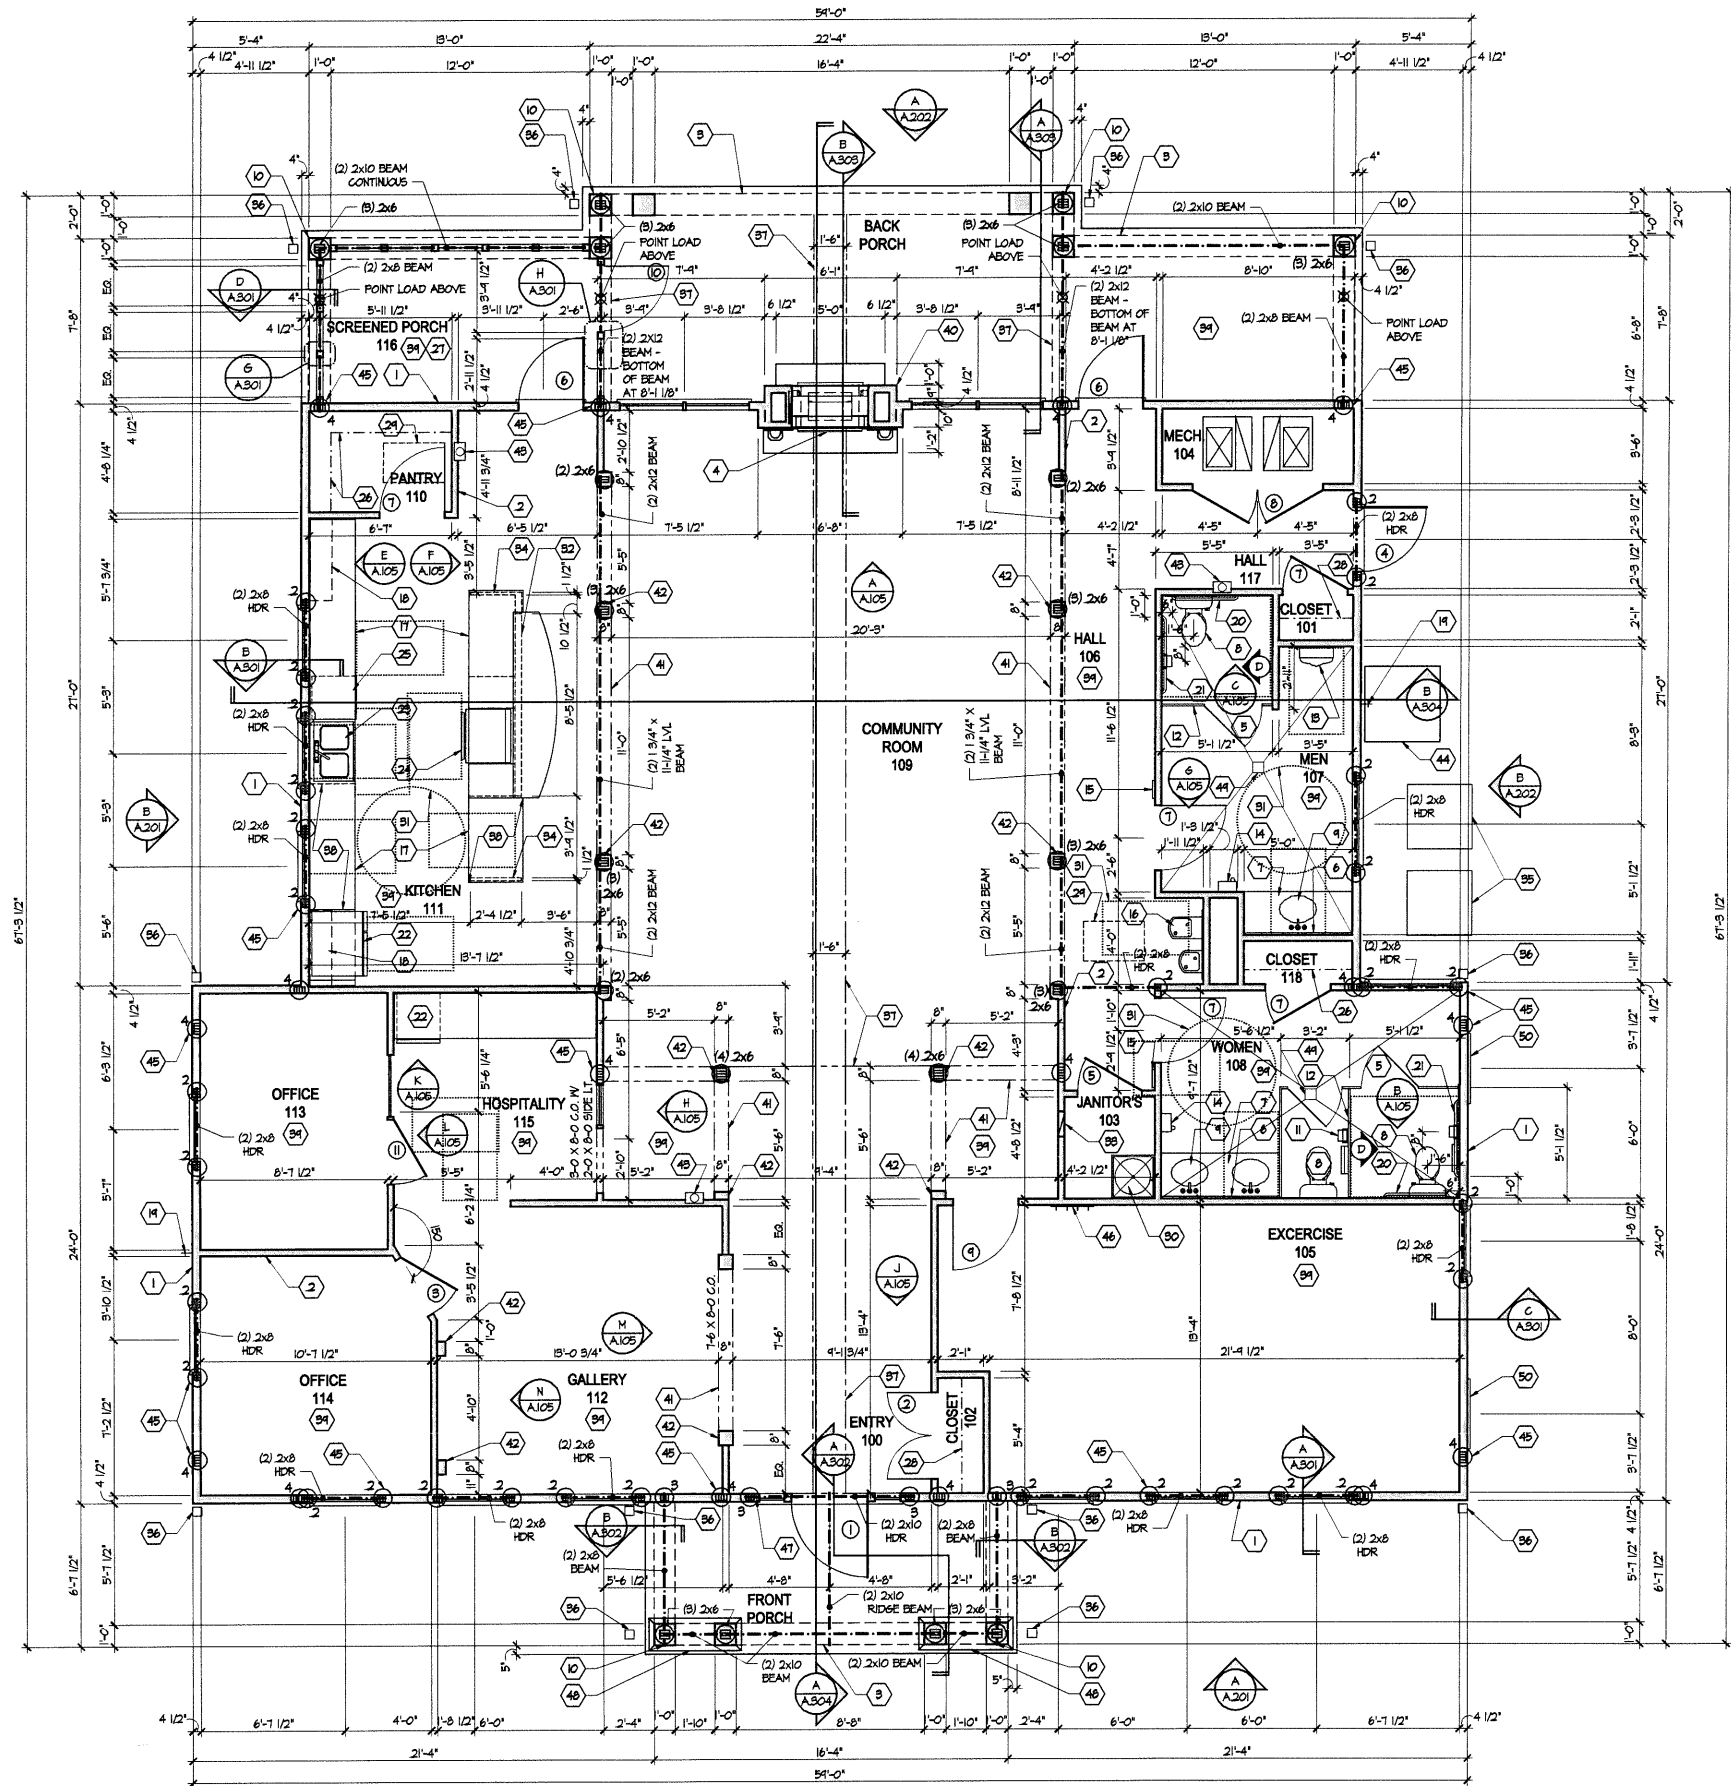

First Floor Plan
Scale: 1/4" = 1'-0"

FIRST FLOOR PLAN CODED NOTES
(DRAWING SHEET A102 ONLY)

1. EXTERIOR STUD MALL - 2 X 4 WOOD STUDS AT 16" O.C. WITH 1/2" DRYMALL ON ALL INTERIOR SURFACES AND 1" ZIP SYSTEM WR-SHEATHING ON EXTERIOR SURFACES. TYPICAL UNLESS NOTED OTHERWISE.
2. INTERIOR STUD MALL - 2 X 4 WOOD STUDS AT 16" O.C. WITH 1/2" DRYMALL ON ALL FINISHED SURFACES - TYPICAL.
3. 12" X 12" BUILT-UP WOOD BEAM - SEE WALL SECTIONS FOR DETAILS AND FIRST FLOOR PLAN FOR STRUCTURAL BEAM SIZES.
4. DIRECT VENT GAS THRU FIREPLACE (OUTDOOR LIFESTYLES, TULLIGHT II INDOOR/OUTDOOR FIREPLACE OR EQUAL) WITH BILTMORE MANTEL IV HEARTH 2 (INTERIOR SIDE). PROVIDE GAS LINE & GAS LOG SET - CONTRACTOR TO VERIFY ALL FRAMING DIMENSIONS AND CLEARANCES WITH MANUFACTURER'S INSTRUCTIONS.
5. ACCESSIBLE TOILET COMPARTMENT DOORS TO HAVE A MIN. CLEAR OPENING WIDTH OF 32" (EXACT DOOR SIZE TO BE DETERMINED BY MANUFACTURER). CLOSER AND GRASPABLE LATCH PER APPLICABLE AIAA STANDARDS & CODE REQUIREMENTS.
6. FRAMELESS MIRROR LOCATION.
7. VANITY COUNTERTOP 34" (MAX.) AFF.
8. ADA COMPLIANT TOILET & SEAT.
9. ADA COMPLIANT COUNTER LAVATORY AND FAUCET.
10. 12" X 12" BUILT-UP COLUMN - SEE ELEVATIONS AND WALL SECTIONS (E ON SHEET B-A502) FOR DETAILS.
11. TOILET TISSUE DISPENSER - MOUNT WITH CENTER AT 22" AFF.
12. TOILET PARTITION - PROVIDE 2 X 6 BLOCKING IN WALL FOR MOUNTING AS NEEDED.
13. URINAL - SET RIM AT 17" AFF.
14. ADA COMPLIANT ELECTRIC HAND DRYER WITH AUTOMATIC SENSOR OPERATION TO BE WALL MOUNTED AT 54" MAX. AFF. TO BOTTOM OF SENSOR LENS.
15. ADA COMPLIANT SIGNAGE AS SHOWN IN DETAIL ON SHEET A104. SIGNAGE IS TO COMPLY WITH ALL NATIONAL AND LOCAL CODES. MOUNT AT 60" AFF. TO CENTER OF SIGN.
16. ADA COMPLIANT DRINKING FOUNTAIN.
17. BASE CABINETS AND COUNTERTOP AT 36" AFF. OR 34" AFF. - SEE INTERIOR ELEVATIONS. FINISH ALL EXPOSED EDGES.
18. LINE OF WALL CABINETS ABOVE.
19. HOSE BIB LOCATION.
20. 36" LONG GRAB BAR - MOUNT HORIZONTALLY WITH CENTER AT 34" AFF.
21. 42" LONG GRAB BAR - MOUNT HORIZONTALLY WITH CENTER AT 34" AFF.
22. REFRIGERATOR LOCATION.
23. DOUBLE BOWL SINK AND FAUCET WITH 30" MIN. WIDE WHEEL CHAIR SPACE BELOW.
24. UNDER COUNTER BUILT-IN OVEN LOCATION.
25. DISHWASHER LOCATION.
26. (4) 16" DEEP WIRE SHELVES (24", 42", 55", 60" AFF.) - STANDARD SPACING.
27. SEE SHEET A501 FOR SCREENED PORCH DETAILS.
28. SINGLE CLOSET ROD & SHELF (61 1/2" AFF.) - VINYL COATED WIRE WITH STANDARD SPACING.
29. ATTIC ACCESS IN CEILING ABOVE 22" X 30" MINIMUM. PROVIDE MIN. 30" CLEAR HEADROOM AT OPENING. PANEL SHALL BE WEATHER-STOPPED AND INSULATED TO A LEVEL EQUIVALENT TO THE INSULATION ON THE SURROUNDING SURFACES. IF IN THE CEILING, A BATTLE IS REQUIRED TO CONTAIN LOOSE-FILL INSULATION.
30. WATER HEATER LOCATION WITH PAN ON SHELF ABOVE MOP SINK. SEE PLUMBING SHEETS FOR MORE INFORMATION.
31. DOTTED LINE INDICATES AREA OF REQUIRED CLEARANCE FOR ADA COMPLIANCE.
32. 1/2" WALL TO UNDERSIDE OF BAR COUNTERTOP.
33. RECESSED ELECTRIC PANEL LOCATION.
34. 2 X 4 WOOD STUDS AT 16" O.C. LAID FLAT WITH 1/2" DRYMALL ON ALL FINISHED SURFACES.
35. HVAC CONDENSER UNIT LOCATION - CONTRACTOR TO COORDINATE PADS (AND LOCATION) WITH HVAC CONTRACTOR - LOCATE UNITS PER APPLICABLE CODES AND MANUFACTURER'S INSTRUCTIONS.
36. INDICATES DOWNSPOUT LOCATION.
37. INDICATES LINE OF BREAK IN CEILING PLANE ABOVE.
38. ADA COMPLIANT COUNTERTOP AT 34" AFF. WITH 30" MIN. WIDE WHEEL CHAIR SPACE BELOW - SEE INTERIOR ELEVATIONS.
39. FLAT DRYMALL CEILING @ 9'-0" AFF.
40. NO R-SHEATHING AROUND EXTERIOR CHIMNEY - SEE FIREPLACE WALL SECTION.
41. BUILT-UP BEAM BOTTOM OF BEAM (TOP OF COLUMN) AT 8'-0" AFF. SEE DETAIL E ON SHEET A104.
42. INTERIOR COLUMN/PLASTER - SEE SHEET A104.
43. SEMI-RECESSED MULTI-PURPOSE DRY CHEMICAL FIRE EXTINGUISHER AND CABINET - 2-A-10-B-C RATINGS MINIMUM. FIRE EXTINGUISHER TO BE ADA COMPLIANT - MOUNT TO ACHIEVE MAX. 48" AFF. TO HANDLE, AND MAX. 4" PROTRUSION FROM WALL. EXACT LOCATION TO BE DETERMINED BY LOCAL AUTHORITY.
44. 42" X 42" SLAB - SLOPE AWAY FROM BUILDING.
45. INDICATES MULTIPLE FULL-HEIGHT STUD COLUMN IN WALL - TYPICAL AT BEARING OF ALL WOOD BEAMS, GIRDER TRUSSES UNLESS NOTED OTHERWISE. SEE PLAN FOR NUMBER OF STUDS REQUIRED.
46. PROVIDE BLOCKING AT 54" AFF. FOR COAT HOOKS.
47. PROVIDE (2) JACKS UNDER ALL HEADERS IN OPENINGS OVER 48" WIDE - TYPICAL.
48. CULTURED STONE BASE WALL ON CONCRETE BLOCK WITH BRICK CAP. SEE ELEVATIONS AND WALL SECTIONS FOR DETAILS.
49. FLOOR DRAIN LOCATION - SLOPE FLOOR NO LESS THAN 1/4" PER FOOT TOWARDS DRAIN.
50. FAUX SHUTTER LOCATION - SEE EXTERIOR ELEVATIONS.

GENERAL NOTES

1. EXTERIOR WALL DIMENSIONS INCLUDE THICKNESS OF SHEATHING.
2. REFER TO SITE LAYOUT PLAN & POOL PLANS FOR POOL LOCATIONS IF APPLICABLE.
3. REFER TO SITE LAYOUT PLAN FOR BUILDING LOCATIONS AND ORIENTATIONS.
4. DOORS NOT OTHERWISE DIMENSIONED SHALL BE LOCATED WITH ROUGH OPENING MIN. 4" FROM INTERSECTING WALLS.
5. REFER TO SITE PLAN FOR SIDEWALK/PORCH SPOT ELEVATIONS & LAYOUT.
6. DOORS AND WINDOWS OPENING DIRECTLY TO THE POOL AREA MUST BE SELF-LATCHING, SELF-CLOSING AND LOCKABLE WITH ACTUATING DEVICE A MIN. 38" AFF.
7. ALL APPLIANCES SHALL BE POSITIONED SO THAT THEY PROVIDE REQUIRED CODE CLEARANCES FOR MAINTENANCE.



Building Prototypes
Building Prototypes
000 Your Street
City State & Zip

PROPRIETARY RIGHTS NOTICE
COPYRIGHT 2015 EPCON COMMUNITIES FRANCHISING, INC.
THE DESIGNS SHOWN HERE, AS WELL AS THE ENTIRE DEVELOPMENT SYSTEM, ARE THE PROPERTY OF EPCON COMMUNITIES FRANCHISING, INC. AND ARE SUBJECT TO COPYRIGHT, PATENT, AND TRADE SECRET PROTECTION. USE OF ANY PART OF THESE DESIGNS OR THE DEVELOPMENT SYSTEM IS PROHIBITED WITHOUT THE WRITTEN CONSENT OF EPCON COMMUNITIES FRANCHISING, INC.
ALL RIGHTS ARE RESERVED IN THIS INFORMATION AND ALL RELATED ILLUSTRATIONS, PLANS, BLUEPRINTS, SKETCHES, DRAWINGS, OR ANY OTHER TANGIBLE EXPRESSIONS THEREOF, WHICH ARE THE PROPERTY OF EPCON COMMUNITIES FRANCHISING, INC. 800 STONEHENGE PARKWAY, DUBLIN, OHIO 43017. TELEPHONE (614) 882-3337. NO ONE MAY BUILD, LICENSE, TRANSFER, REPRODUCE OR DUPLICATE THIS WORK IN ANY WAY WITHOUT THE WRITTEN AUTHORIZATION OF EPCON COMMUNITIES FRANCHISING, INC.
THESE DRAWINGS SHALL BE USED IN CONFORMANCE WITH ALL LOCAL BUILDING, MECHANICAL, PLUMBING AND ELECTRICAL CODES AND SHALL MEET THE REQUIREMENTS OF THE HEALTH DEPARTMENT, FIRE MARSHALL, AMERICANS WITH DISABILITIES ACT ACCESSIBILITY GUIDELINES (ADAAG), THE FAIR HOUSING ACT ACCESSIBILITY GUIDELINES (FHAAG), AND SHALL BE CONSTRUCTED IN CONFORMANCE WITH STATE AND LOCAL ENERGY REQUIREMENTS.

Prototype Disk No.	Interim Revision	Page	Revisions Date
			9/7/17

Architect Project Number

Community Dates & Revisions
Date Originated
Bid
Permit
Construction
Revisions
▲
▲
▲

Drawing Title
First Floor Plan

Architectural Style
European Country
Sheet Number
A.102
Clubhouse 'Medium'